


EKF 711 TC



COMBI OVEN WITH TOUCH CONTROL



A compact, minimal design for an oven that allows you to unleash your creativity at the touch of a screen. Designed for medium-sized restaurants and delicatessens needing to cook anything from standard food to sophisticated dishes quickly and without the hassle of complicated programming. Anything from macaroni cheese and oven-roasted pork fillet to steamed French beans and cheese soufflé. Controlled steam injection even allows you to cook your favourite meat or fish recipes under vacuum. The oven, like all appliances in the Touch range, has an IPX5 water ingress protection rating.

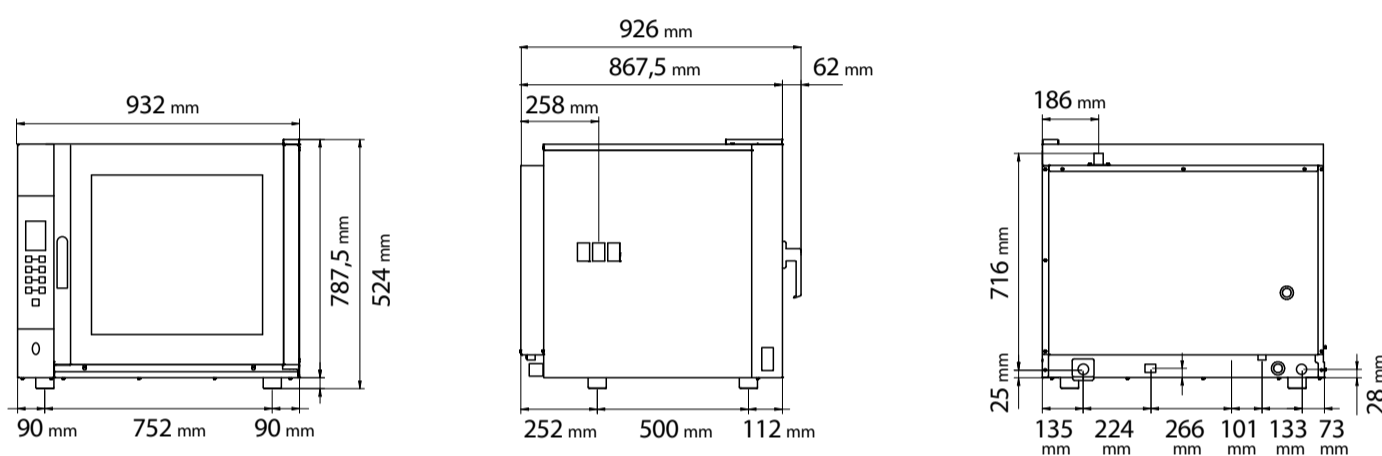

DIMENSIONAL FEATURES

Oven dimensions (WxDxH mm)	932	926	824
Oven weight (kg)	98		
Distance between rack rails (mm)	68		

ELECTRICAL FEATURES

Power supply (kW)	10,5
Frequency (Hz)	50/60
Voltage (Volt)	AC 380/400 3N
N° of motors	2 Bidirectional
Boiler	/
Protection against water	IPX5

EQUIPMENT

Cardboard box dimensions with pallet (WxDxH mm)	1000	990	990
Lateral supports	1right + 1left		
Cable	Three-phase [5G 2,5] - L=1600 mm		
Manual + automatic washing set up			
Plug for core probe			
Removable drip box			
USB port			

OPTIONAL

Kit for overlapping ovens	Cod. EKKM6
Chromed grid 1/1 GN	Cod. KG9G
AISI 304 vertical chicken cooking pan	Cod. KGP
Fat drip pan for chicken grids	Cod. EKT11RG
AISI 304 tray 1/1 GN (530x325x40 mm)	Cod. KT9G
Table	Cod. EKT 711 - Cod. EKTR 711 Cod.EKTS 711 - Cod. EKTRS 711 Cod.EKT 711 D - Cod. EKTPL - Cod. EKTC
Condensation hood	Cod. EKKC6
Air reducer	Cod. EKRP/A
Core probe	Cod. EKSC
Core probe with support	Cod. EKSCS
Self-cleaning automatic system	Cod. KWT/A
Spray kit with support	Cod. EKKD
Sparkling aid	Cod. KBRILD e Cod. KBRILMD
Cleaning Fluid	Cod. KDET

FUNCTIONAL FEATURES

Power	Electricity
Capacity	N° 7 trays/grids 1/1 GN
Type of cooking	Ventilated
Steam	Direct steam controlled by touch screen (10 levels)
Cooking chamber	AISI 304 Stainless steel
Temperature	30 ÷ 260°C
Temperature control	Digital probe thermometer
Control panel	Touch control - Left side
N° of programs	240
Programmable cooking steps	9
Pre-heating temperature	180°C
Pre-heating function	Programmable
Door	Right side opening Ventilated Inspectionable glass
Modularity	Available
Feet	Not Adjustable

PLUS

USB port to upload and download recipes and HACCP data
240 storable recipes (40 Eka recipes, 200 user-settable recipes)
Delayed start function up to 23 hours and 59 minutes
12 languages for the control panel (Italian-French-English-German-Spanish-Romanian-Polish-Bulgarian-Ukrainian-Russian-Turkish-Greek)
Chamber drain for liquids
Direct chimney for cooking fumes/steam
Double connection water entry (normal and softened)
"All glass" door with "satin-finish" (AISI 304) stainless steel side profiles
Quick cooling of cooking chamber
Screen-printed glass control panel
Adjustable door hinges
Quick fastening of lateral supports
Stainless steel cooking chamber
Embedded gasket
Stackable
Forced cooling system of inner parts
IPX 5
Manual+automatic washing set up
CB certification