

# 6040 G1 CUBO PREMIUM ICE CREAM



## COLORS



## FINISHING



## FEATURES



## KEY FEATURE

- Visibility:** extraordinary enhancement of displayed products
- Reliability:** hermetic single-phase compressor, single evaporator, automatic reverse cycle defrost
- Practicality:** double opening system for easily serving over, cleaning and display refurbishing
- Customizable:** great possibility to customize front side panels
- Energy Saving:** double LED lighting as standard


The new G1 upper glass structure is the solution preferred by architects and designers, for its elegance, linearity and absolute transparency. With double opening (patent pending) - Sliding on the operator side, and lifting up on the customer side - G1 is extremely practical and appreciated. The whole castle structure works as a glass table and helps the customer service. LED lighting system as standard.

# 6040

**CIAM**  
REFRIGERATION DESIGN

# 6040 G1 CUBO PREMIUM ICE CREAM

## SECTIONS AND MODELS

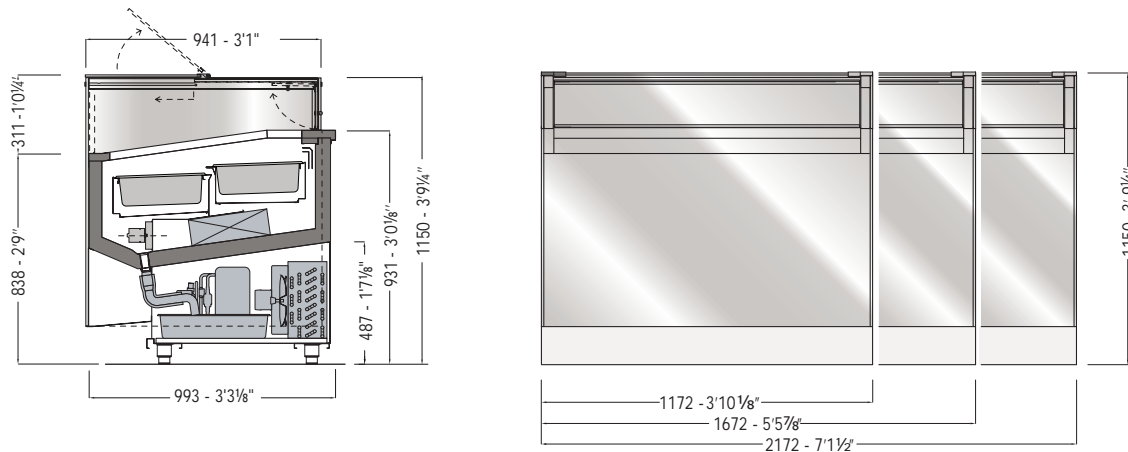

**6040 G1 CUBO - ICE-CREAM**



TECHNICAL FEATURE		VERSIONS			
		1150	1650	2150	2150 Double Temp.
External dimensions (L-D-H)	inches mm	46 7/8" - 39 1/8" - 45 1/4" 1172-993-1150	65 7/8" - 39 1/8" - 45 1/4" 1672-993-1150	85 1/2" - 39 1/8" - 45 1/4" 2172-993-1150	85 1/2" - 39 1/8" - 45 1/4" 2172-993-1150
Crated dimensions (L-D-H)	inches mm	59" - 48 7/8" - 55 1/8" 1500-1240-1400	74 3/4" - 48 7/8" - 55 1/8" 1900-1240-1400	90 1/2" - 48 7/8" - 55 1/8" 2300-1240-1400	90 1/2" - 48 7/8" - 55 1/8" 2300-1240-1400
Pans layout 5,2 Lt / mm.360x165x120h 14" - 6 1/2" - 4 3/4"	flavors nr. / configuration	12	18	24	24 (12+12)
Pans layout 5,2 Lt / mm.360x250x80h 14" - 9 7/8" - 3 1/8"	flavors nr. / configuration	8	12	16	16 (8+8)
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigerated display area	Type	Deck	Deck	Deck	Deck
Operating temperature	°C / °F	-18 / -0.4	-18 / -0.4	-18 / -0.4	-18 / -0.4
Compressor	nr. / Type	1 / hermetic	1 / hermetic	1 / hermetic	2 / hermetic
Cooling power *	(W)	630	890	1050	600+600
Electric supply **	(V/ph/Hz)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)
Power consumption	(W/A)	1800/9,5	2200/11,5	2700/14,0	3000/15,5
Defrost	Mode / type	reverse cycle	reverse cycle	reverse cycle	reverse cycle
Climatic class	N°/°C (F°)/H.R.	4/30 (86)/55%	4/30 (86)/55%	4/30 (86)/55%	4/30 (86)/55%
Refrigerant Gas	Type	R452A	R452A	R452A	R452A
Net weight	Kg / Lb	190 / 418	230 / 507	270 / 595	300 / 661
Crated weight	Kg / Lb	290 / 639	360 / 793	425 / 936	455 / 1003

### STANDARD FEATURE

- LED lighting system
- Extra clear glass (only for G1cubo)
- Patented upper sliding glass system

### OPTIONAL

- Working top perimeter (brushed s/s, corian, black HPL, granite)
- S/s display trays for ice cream cakes
- Switch device from low temp. (-18°C) to positive temp. (+4°C)
- Dipper well
- Cone holder
- S/s pans dim. mm360x165x120h
- S/s pans dim. mm360x250x80h
- Remote condensing unit
- Wheels kit

\* At -33°C of expansion

\*\* Data refer to internal compressor versions. The external compressors might be three-phase.

The company reserves the right to make modifications to the products without prior notice.

CIAM s.p.a. | Viale dei Pini 9 | 06081 | Petriano di Assisi | PG - Italy | Tel: 0039 07580161  
web: www.ciamweb.it | mail: info@ciamgroup.it

2017 / v1.0



**CIAM**  
REFRIGERATION DESIGN

# 6040