

# CIAO VO GELATO



## FINISHING



## COLORS



## FEATURES



## KEY FEATURE

- Visibility:** extraordinary enhancement of displayed products
- High performances:** class +4 / double air flow ventilation system / oversized monophase built-in compressor - automatic reverse cycle defrost
- Customizable:** great possibility to customize front side panels
- Energy Saving:** LED lighting as standard for a perfect uniformity effect and energy saving


# CIAO

CIAO is the a new line of professional gelato cabinet by CIAM. Appositely developed for spot sales in tropical ambient condition (class 4+). Monolithic Display tank in injected polyurethane and S/S coated with rounded edges for cleaning purpose. Heated and Tempered front straight glass with lift up top glass (R4up). LED lighting standard for a perfect uniformity effect and energy saving. Double air flow ventilation system to equalize temperature and ensure perfect ice-cream maintenance long over the time. Silenced Mono-phase Hermetic compressor with oversized double fan condenser. Automatic reverse cycle defrost. Main frame in carbon steel painted, adjustable S/S feet or pivoting castor with brake as option. Sides in HPL white as standard, Front panel in RAL color or graphic finishing (optional).

**CIAM**  
REFRIGERATION DESIGN

# CIAO VD GELATO

## SECTIONS AND MODELS

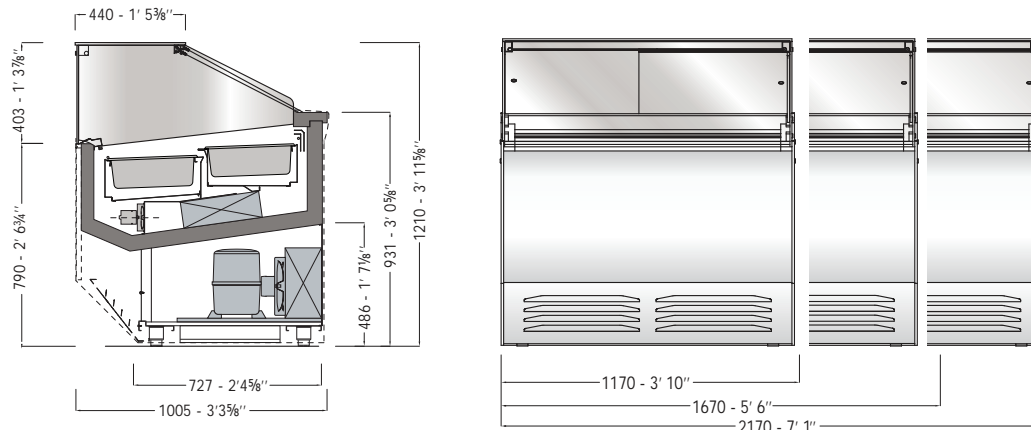

### CIAO VD - GELATO

TECHNICAL FEATURE		VERSIONS			
		1150	1650	2150	2150 Double Temp.
External dimensions (L-D-H)	inches mm	46'' - 41 1/2'' - 50 1/2'' 1170 - 1055 - 1283	65 3/4'' - 41 1/2'' - 50 1/2'' 1670 - 1055 - 1283	85 1/2'' - 41 1/2'' - 50 1/2'' 2170 - 1055 - 1238	85 1/2'' - 41 1/2'' - 50 1/2'' 2170 - 1055 - 1238
Crated dimensions (L-D-H)	inches mm	53 1/8'' - 50 3/8'' - 57 7/8'' 1350 - 1280 - 1470	74 7/8'' - 50 3/8'' - 57 7/8'' 1900 - 1280 - 1470	90 1/2'' - 50 3/8'' - 57 7/8'' 2300 - 1280 - 1470	90 1/2'' - 50 3/8'' - 57 7/8'' 2300 - 1280 - 1470
Pans layout 5,2 Lt / mm.360x165x120h 14 1/8'' - 6 1/2'' - 4 3/4''	flavors nr. / configuration	12	18	24	24 (12+12)
Pans layout 5,2 Lt / mm.360x250x80h 14 1/8'' - 10'' - 3 1/8''	flavors nr. / configuration	8	12	16	16 (8+8)
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigerated display area	Type	Deck	Deck	Deck	Deck
Operating temperature	°C / °F	-18 /-0.4	-18 /-0.4	-18 /-0.4	-18 /-0.4
Compressor	nr. / Type	1 / hermetic	1 / hermetic	2 / hermetic	2 / hermetic
Cooling power *	(W)	630	860	1050	550+550
Electric supply	(V/ph/Hz)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)
Power consumption	(W/A)	1700/9,0	2200/11,5	2700/14,0	3000/15,0
Defrost	Mode / type	reverse cycle	reverse cycle	reverse cycle	reverse cycle
Climatic class	N°/°C(F°)/H.R.	4+ /30 (86)/55%	4+ /30 (86)/55%	4+ /30 (86)/55%	4+ /30 (86)/55%
Refrigerant Gas	Type	R452A	R452A	R452A	R452A
Net weight	Kg - Lb	210 / 462	278 / 612	320 / 705	340 / 749
Crated weight	Kg - Lb	305 / 672	408 / 899	480 / 1058	500 / 1102

\* At -33°C of expansion

The company reserves the right to make modifications to the products without prior notice.

CIAM s.p.a. | Viale dei Pini 9 | 06081 | Petignano di Assisi | PG - Italy | Tel: 0039 07580161  
web: [www.ciamweb.it](http://www.ciamweb.it) | mail: [info@ciamgroup.it](mailto:info@ciamgroup.it)

2017 / v1.0



#### STANDARD FEATURE

- LED lighting system
- Front and side heated glasses
- Double air flow refrigeration system
- Reverse cycle defrost system
- Hermetic compressor
- Plexiglass sliding doors closure

#### OPTIONAL

- Dual temperature switch (-18°C / +5°C) (-0.4F / +41°F)
- S/s display trays for cakes
- S/s pans dim. mm360x165x120h
- S/s pans dim. mm360x250x80h
- Remote condensing unit
- Self rolling night curtain
- Dipper well
- Cone holder
- Wheels kit

# CIAO



**CIAM**  
REFRIGERATION DESIGN